


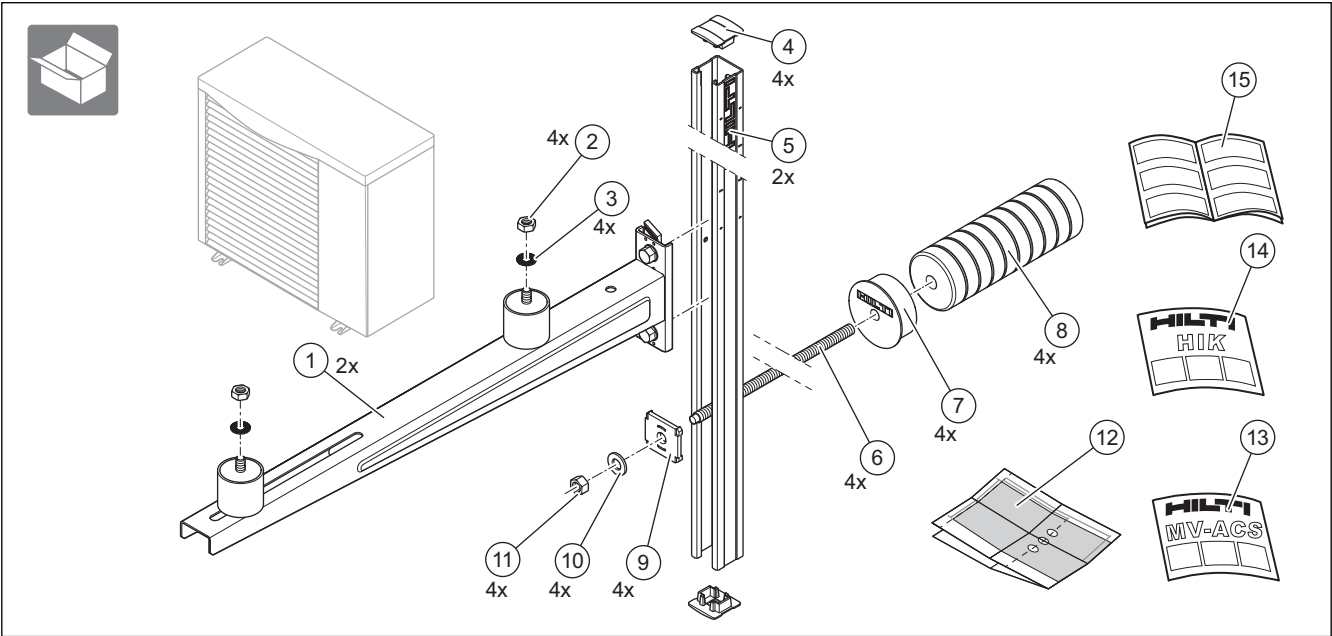
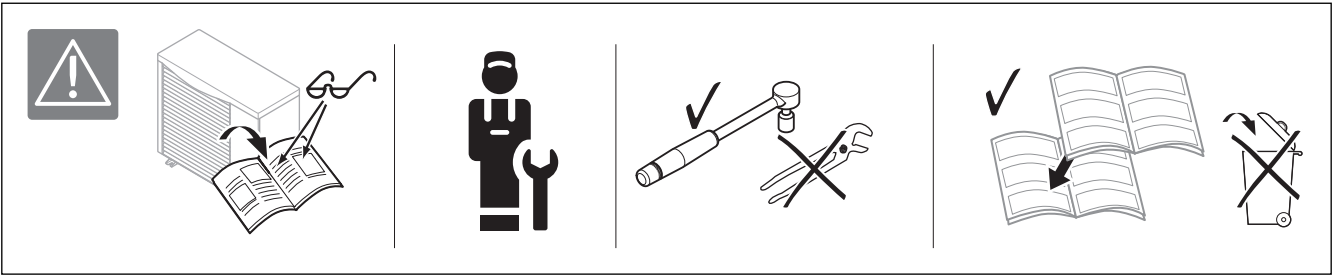






0020250224






max. 160 mm		EN 771	DIN 105	Hilti	max. kg	
		min. C20/25	min. C20/25	HIT HY 170 + HIK HIT-C-F M12 x 450 10.9	173 kg	
		CL 12 G1 B 0,11 240 x 115 x 113 CS 12 G1 B 0,11 240 x 115 x 113	KS12, 2DF & MZ12, 2DF	HIT HY 170 + HIK HIT-C-F M12 x 450 10.9		
				   x kg	≤ 173 kg	


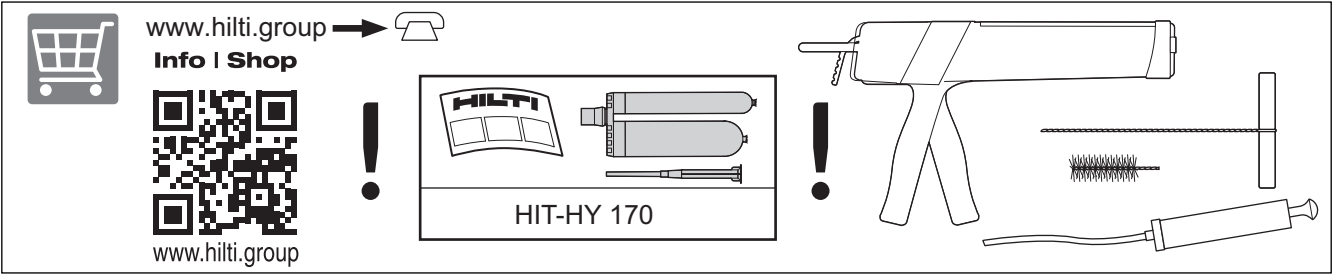



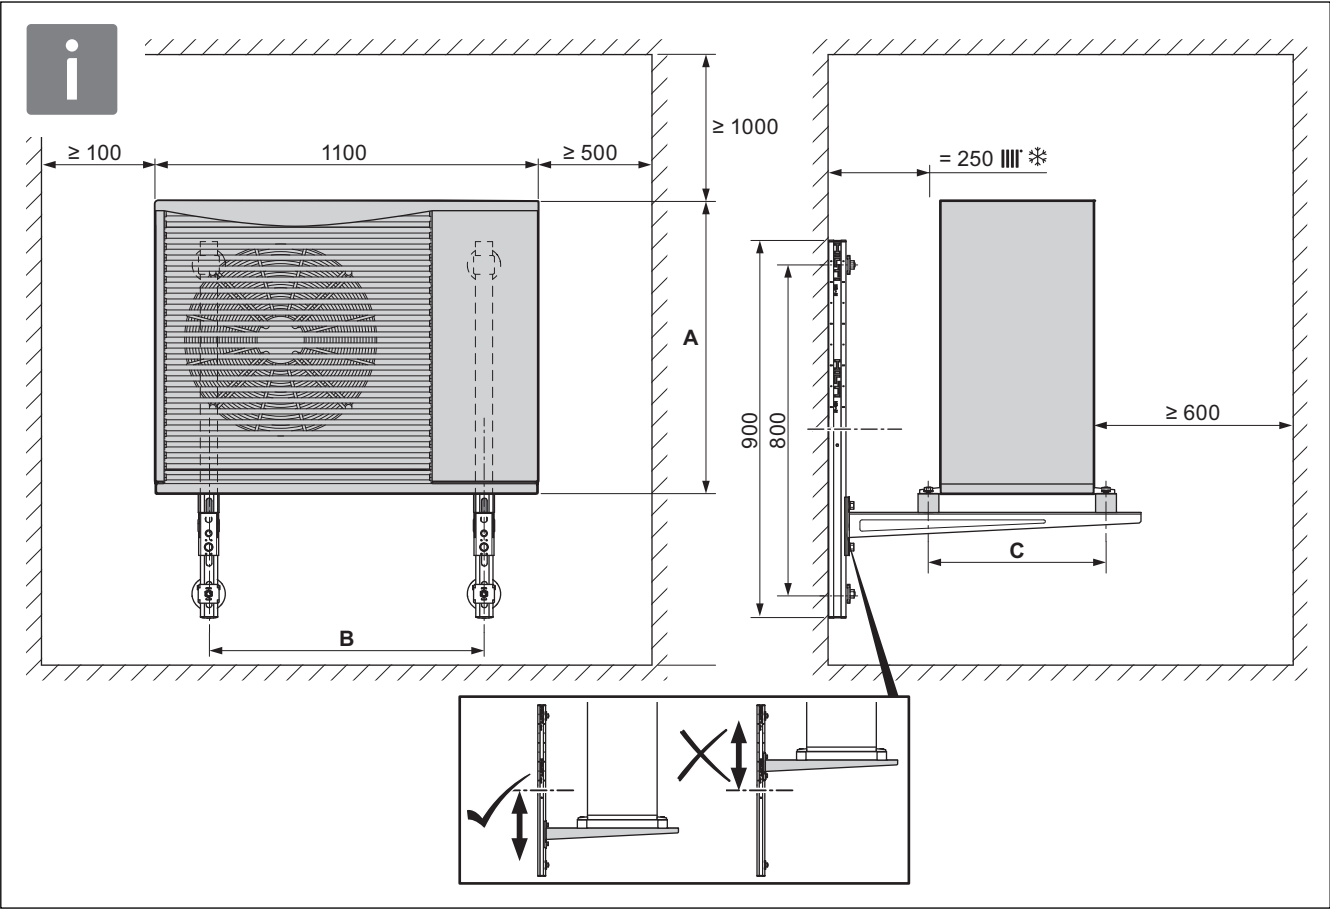


				
A	mm	840	975	765, 965
B	mm	740	778	740
C	mm	386	437	477
		#3	#4	#3

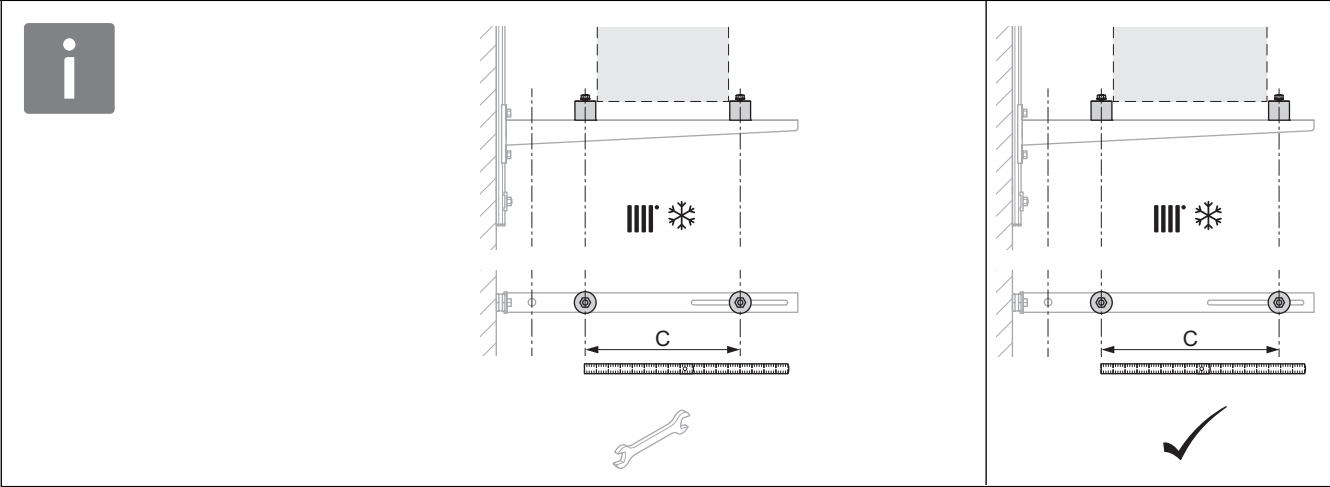

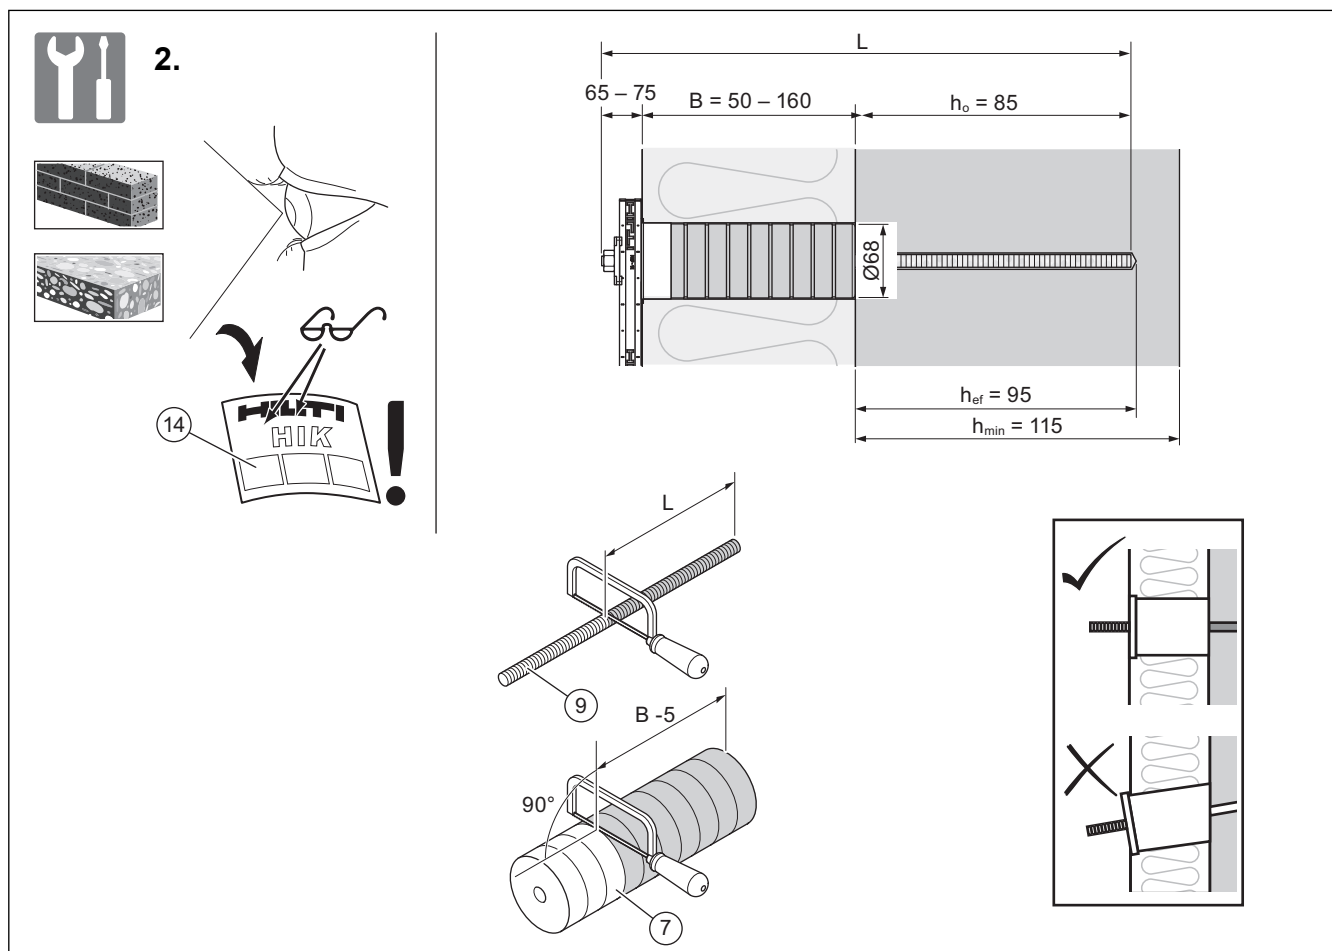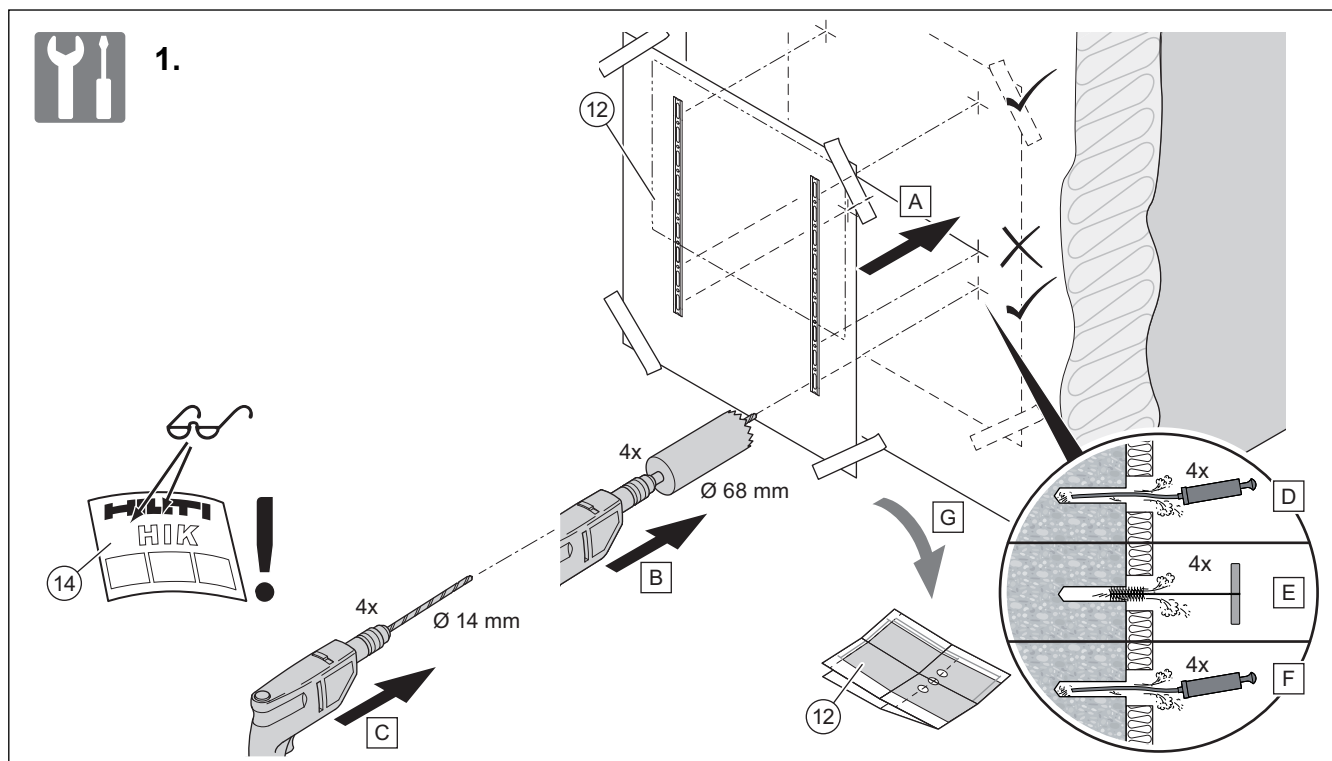


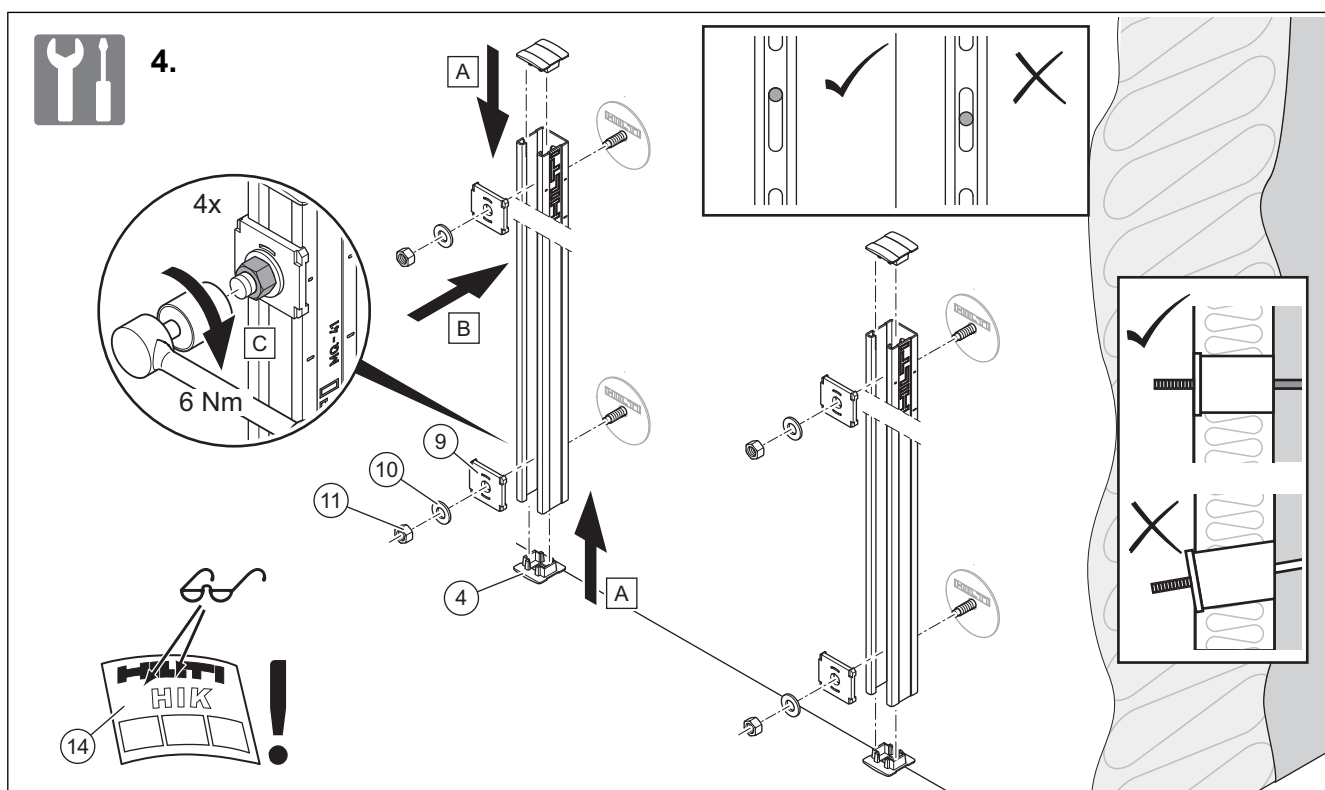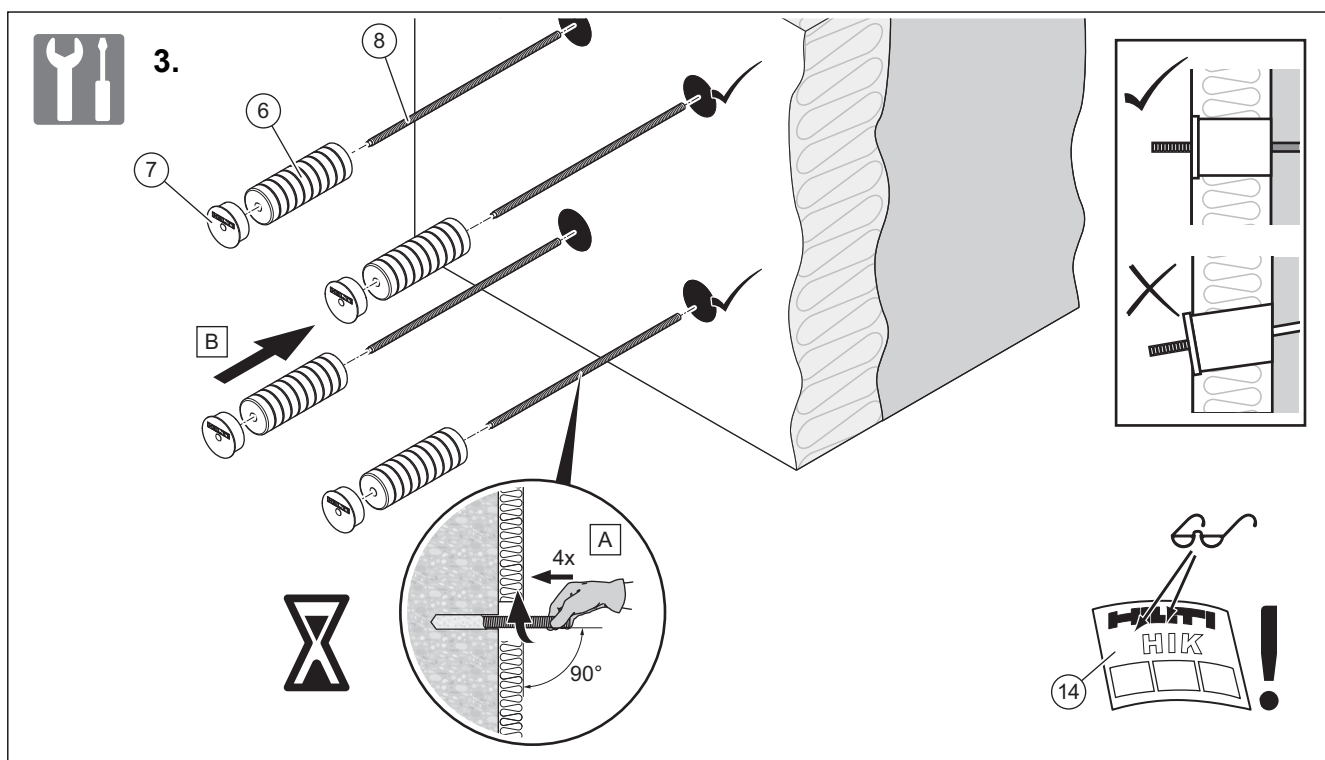

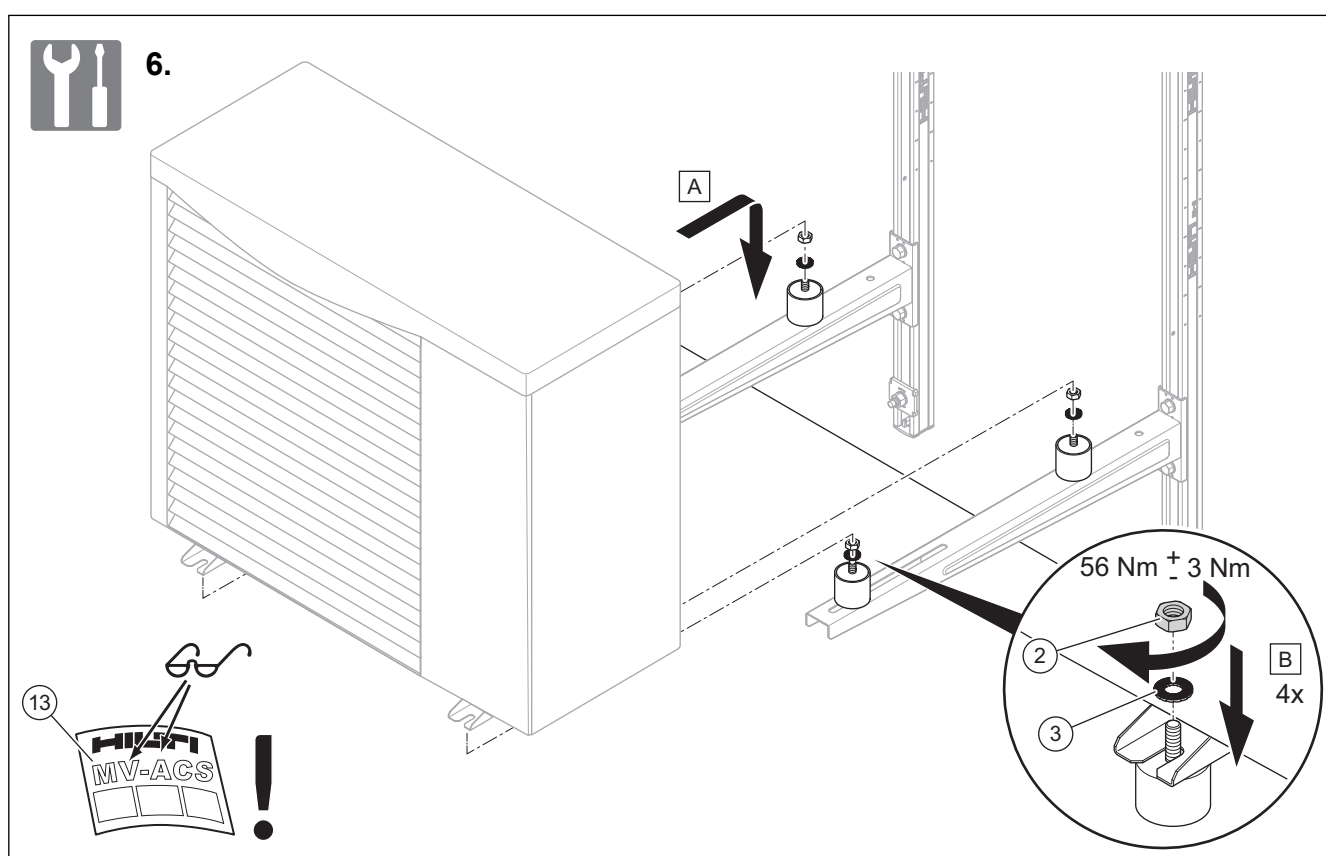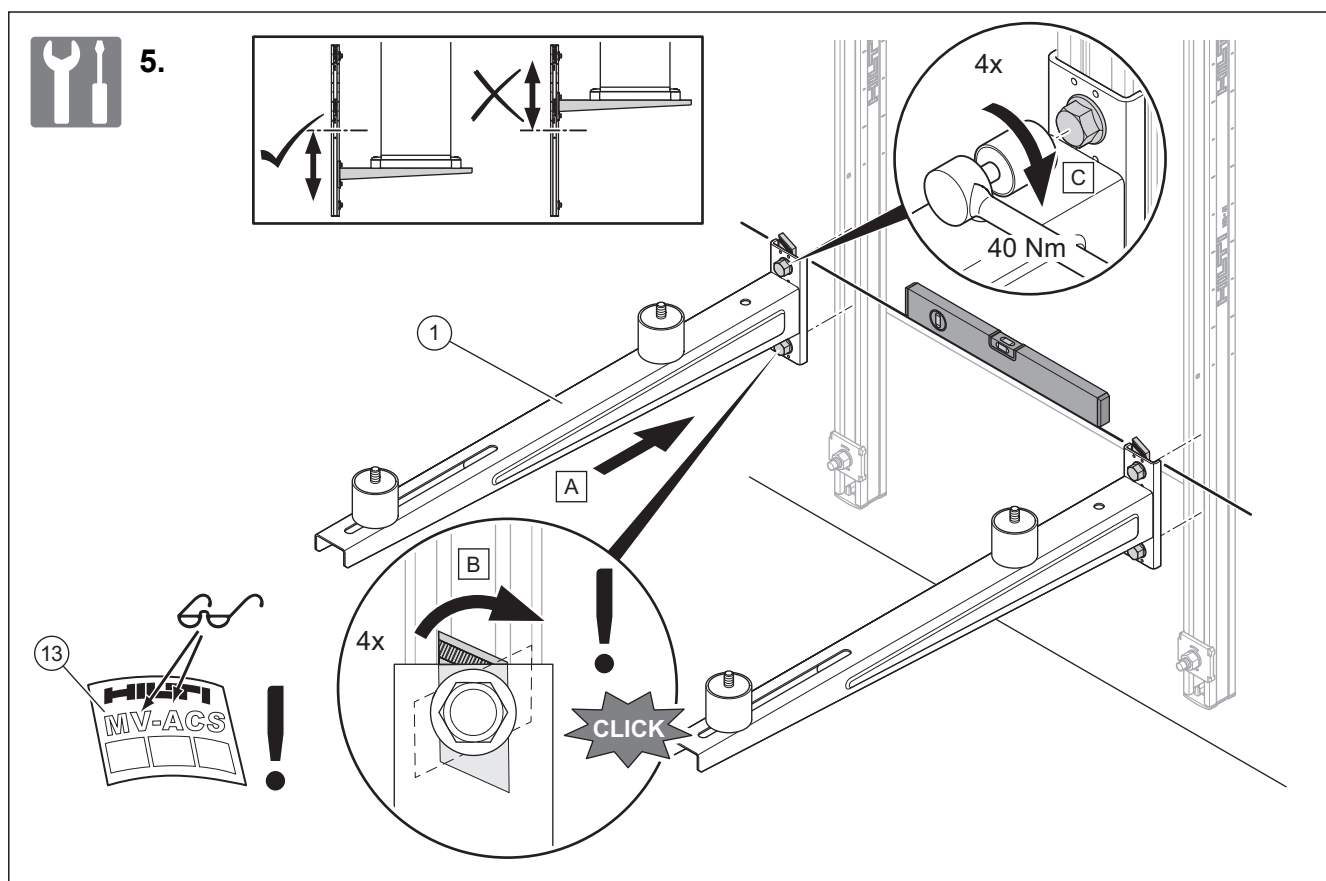



7.

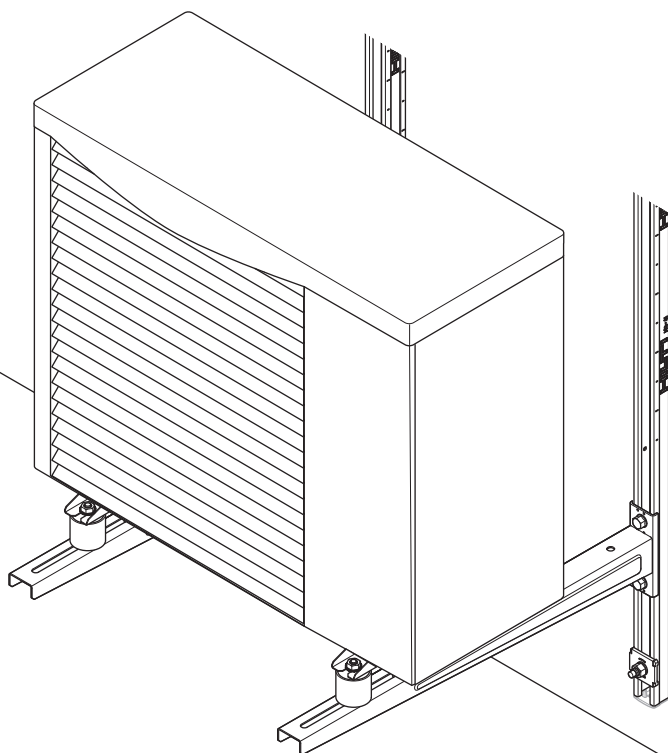

3 x 365 days



1 x 365 days








1 x 365 days



....

4x

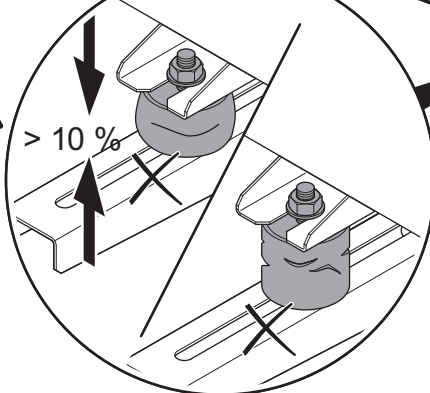

0020252091



0020252038_04

Manufacturer
Vaillant GmbH

Berghauser Str. 40 ■ D-42859 Remscheid
Tel. +49 2191 18 0 ■ Fax +49 2191 18 2810
info@vaillant.de ■ www.vaillant.de

© These instructions, or parts thereof, are protected by copyright and may be reproduced or distributed only with the manufacturer's written consent.
Subject to technical modifications.

0020252038_04 INT 052021